

TWO-LAYER IMAGEABLE ELEMENT COMPRISING
THERMALLY REVERSIBLE POLYMERS

5

BACKGROUND OF THE INVENTION

This application is a Continuation-In-Part and claims priority from
U.S. Application Serial No. 09/751,650, filed December 29, 2000.

10

1. FIELD OF THE INVENTION

15

20

25

The present invention relates to a two-layer imageable element including a substrate, a top layer including a first thermally imageable composition including a first thermally sensitive supramolecular polymer; and disposed between the substrate and the top layer, a bottom layer including a second thermally imageable composition including a second thermally sensitive supramolecular polymer. The thermally sensitive supramolecular polymer, which includes at least one covalently bonded unit and at least one thermally reversible non-covalently bonded unit that includes a two or more centered H-bond within each non-covalently bonded unit. More particularly, the present invention relates to a method of producing a two-layer imaged element.

2. DESCRIPTION OF THE PRIOR ART

30

WO 98/14504 discloses a supramolecular polymer containing monomeric units, which in pairs, form at least 4 H-bridges with one another. The article in *J. Org. Chem.*, **53**, 5787-9 (1988) discloses bifunctional compounds that can associate into polymers or oligomers by

2-center H-bond units. Supramolecular polymers based on 3-center H-bond units are disclosed in *Macromolecules*, **28**, 782-83 (1995). None of the above references discloses the use of these polymers in thermal imaging.

5

EP 969 966 discloses phenolic polymers together with a non-photosensitive solubility inhibitor which provides acceptor sites for H-bonding and EP 985 166 discloses the corresponding methods. The present invention is directed to a supramolecular polymer having non-covalent interactions, such as H-bonding, as an integral part of the polymer structure. The H-bonding in the present invention is not between a H-donor polymer and a solubility inhibitor having H-acceptor sites, but is an integral part of the polymer structure.

10

WO 99/01795 discloses phenolic polymers, which are modified with groups that provide acceptor sites for H-bonding with other phenolic polymers. The present invention is directed to a supramolecular polymer having non-covalent interactions as an integral part of the polymer structure.

15

20

An article by B. J. B. Folmer et al., *Advanced Materials*, Vol. **12** (No. 12), pages 874-878 (2000), discloses supramolecular polymer materials. The article does not disclose polymers derived from polyfunctional materials, such as, polyfunctional phenolic resin, acrylic resin, polyester resin or polyurethane resin, nor does it disclose the use thereof in thermal imaging.

25

U.S. Patent 6,143,464 describes a thermal positive image forming material in a single layer system. The photosensitive layer has sea/island structure. Photosensitive composition includes a co-polymer including 10 mol% or more of at least one of: (a) a monomer having in the molecule a

30

1003493-12001

sulfonamide NH group, (b) a monomer having in the molecule an active imino group and (c) acrylamide, methacrylamide, acrylate, methacrylate or hydroxy styrene, each having a phenolic hydroxyl group.

5 JP 2000-330265-A describes a thermal positive image forming composition in a single layer system. The photosensitive composition includes a resin, which has a urea bond on a side chain. The resin is dissolved into alkaline aqueous solution.

10 EP 908305 describes a thermal positive photosensitive composition in a double layer system. The top layer is sensitive to IR-radiation. Bottom layer includes a resin, which is soluble in an alkaline aqueous solution.

15 EP 909657 describes a thermal positive image forming material in a double layer system. Top layer includes a resin having phenolic hydroxyl groups and an IR-dye. The bottom layer includes co-polymer having sulfonyl amide group.

20 The present invention describes a 2 layer system, wherein both top and bottom layers have a thermally sensitive supramolecular polymer containing a non-covalently bonded unit, such as, a quadruple hydrogen bonding (QHB) unit.

25 SUMMARY OF THE INVENTION

The present invention includes a two-layer imageable element including:

a substrate;

30 a top layer including a thermally imageable composition, which includes: (a) a first thermally imageable composition including a first

thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat; the first thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each the non-covalently bonded unit or (b) a thermally imageable composition free of the first thermally sensitive supramolecular polymer; and

disposed between the substrate and the top layer, a bottom layer including a second thermally imageable composition including a second thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat; the second thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit.

The present invention further includes a two-layer imageable element including:

a substrate;
a top layer including a first thermally imageable composition including a first thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat, the first thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit; and

disposed between the substrate and the top layer, a bottom layer including a second thermally imageable composition including a second thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat; the

second thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit.

5

The present invention also includes a method of producing an imaged element. The method includes the steps of:

providing a two-layer imageable element including a substrate, a top layer including a thermally imageable composition including: (a) a first thermally imageable composition including a first thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat; the first thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit or (b) a thermally imageable composition free of the first thermally sensitive supramolecular polymer; and disposed between the substrate and the top layer, a bottom layer including a second thermally imageable composition including a second thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat; the second thermally sensitive supramolecular polymer including: at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit;

25

exposing the two-layer imageable element to thermal radiation to produce imagewise exposed regions; and

contacting the exposed two-layer imageable element and a developer within a period of time after the exposing step to remove the exposed regions and thereby produce the imaged element.

30

In the present invention, the image areas are reinforced with strong two or more centered H-bond links. Therefore, the image areas exhibit long press life and increased resistance to press chemicals when compared with the systems of the prior art, which include relatively weak single H-bond units. Thus, the thermally reversible polymers of the present invention can have relatively strong bonds and provide thermal solubilization systems that have enhanced differentiation between exposed and non-exposed areas. These polymers can undergo thermal solubilization and provide a durable, non-exposed area, corresponding to the etch resist in a PCB or to the image area in a printing plate.

The two-layer thermal positive working "computer-to-plate" systems, here after "CTP plates," according to the present invention have excellent solvent resistance, high run lengths and wide developer latitudes. The imagewise exposure and development steps of the present invention do not require an intermediate pre-development heating step. In addition, superior press life is achieved without the need of a post-development bake because of the strength of the two or more centered H-bond links, such as, 4-centered H-bond units, in the image areas. The superior press life resulting from the strongly bonded image is unexpected for a two-layer, no-preheat, digitally imaged composition. In addition, the inventive element of the present invention is relatively simple to manufacture. Accordingly, the present invention provides thermally reversible polymers that can be used in simple and cost effective methods that are useful in thermal imaging of lithographic plates and circuit boards.

DETAILED DESCRIPTION OF THE INVENTION

Lithographic printing is based on the immiscibility of oil and water. Ink receptive areas are generated on the surface of a hydrophilic surface. When the surface is moistened with water and then ink is applied, the

hydrophilic background areas retain the water and repel the ink. The ink receptive areas accept the ink and repel the water. The ink is transferred to the surface of a material upon which the image is to be reproduced. Typically, the ink is first transferred to an intermediate blanket, which in turn transfers the ink to the surface of the material upon which the image is thereafter reproduced.

Lithographic printing plate precursors, i.e., imageable elements, typically include a radiation-sensitive coating applied over the hydrophilic surface of a support material. If after exposure to radiation, the exposed regions of the coating become soluble and are removed in the developing process, revealing the underlying hydrophilic surface of the support, the plate is called a positive-working printing plate. Conversely, if exposed regions of the plate become insoluble in the developer and the unexposed regions are removed by the developing process, the plate is called a negative-working plate. In each instance, the regions of the radiation-sensitive layer that remain (i.e., the image areas) are ink-receptive and the regions of the hydrophilic surface revealed by the developing process accept water and repel ink.

The present invention is useful in positive-working printing plates, which include a substrate, a bottom layer coated on the substrate and a top layer coated on the bottom layer. Preferably, the surface of the substrate underlying the thermally imageable layers is hydrophilic.


Solvent resistance of thermal positive CTP plates is generally, poor. The present inventors have found that solvent resistance of two-layer thermal positive CTP plates can be improved by using a quadruple hydrogen bonding (QHB) functional polymer in the bottom layer. The two-layer thermal positive plates according to the present invention also had good developing latitudes and high run lengths.

The top layer can include either (a) a first thermally imageable composition including a first thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat, or (b) a thermally imageable composition free of the first thermally sensitive supramolecular polymer. The first thermally sensitive supramolecular polymer includes at least one covalently bonded unit and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit. The thermally imageable composition that is free of the first thermally sensitive supramolecular polymer can be any suitable composition that is free of the first thermally sensitive supramolecular polymer. Preferably, the composition that is free of the first thermally sensitive supramolecular polymer includes a novolak resin and an infrared dye.

The bottom layer, which is disposed between the substrate and the top layer, includes a second thermally imageable composition including a second thermally sensitive supramolecular polymer which exhibits an increased solubility in an aqueous developer solution upon exposure to heat. The second thermally sensitive supramolecular polymer includes at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or more centered H-bond within each non-covalently bonded unit.


The term "unit" in the context of the present invention refers to any chemical group, moiety or functionality. Examples of such units include covalently bonded units, such as those derived from novolak resins, and non-covalently bonded units, i.e., two or more centered H-bond links, such as those derived from 4-centered H-bonded units.

Such 4-centered H-bonded units in a preferred embodiment have a structure resulting from association of the two sites capable of quadruple hydrogen bonding, namely two isocytosine units. The association of the two quadruple hydrogen bonding sites and the quadruple hydrogen bonded unit resulting therefrom, i.e., the 4-centered H-bonded unit, is schematically represented below for the "keto" tautomer, which is one of the two possible tautomeric forms of the isocytosine ring system. The schematic representation is for an isocytosine having the substituent -CH₂CH₂CH₂-R:

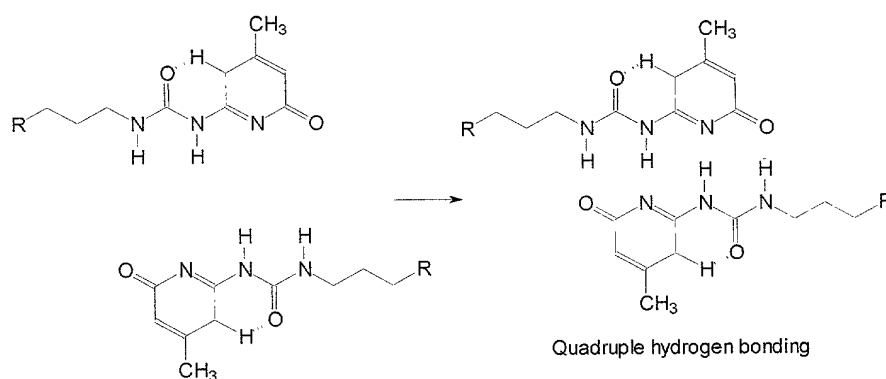

The 4-centered H-bonded unit can result from the association of two sites that are in the "enol" tautomeric form in which the hydrogen is on the oxygen atom instead of being on the nitrogen. The "keto" and "enol" tautomeric forms of an isocytosine derivative are described and proposed structures shown in the previously cited WO 98/14504, the contents of which are incorporated herein by reference in its entirety. Accordingly, whenever a composition of present invention is represented by the formula of the "keto" form, it should be understood that the actual compound will exist either in the "keto" or in the "enol" tautomeric forms or in a combination of the "keto" and "enol" tautomeric forms.

As an example, the formation of such a 4-centered H-bonded unit according to the present invention resulting from a 4-centered H-bonding interaction of two 6-methylisocytosinyl groups, each attached to a group R, is schematically represented below:

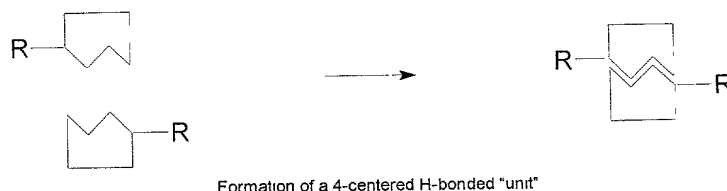

The term "supramolecular polymer" in the context of the present invention refers to a polymer which derives its polymeric properties through a combination of covalent bonds and specific secondary interactions, which includes hydrogen bonding, particularly two or more centered H-bond links. Such secondary interactions provide high bond strength and contribute substantially to the polymeric behavior.

The non-covalently bonded unit according to the present invention includes at least a two-centered H-bond within each unit. Preferably, the non-covalently bonded unit includes a two, three or four centered H-bond within each unit. H-bonds that are higher than four centered can also be useful in the present invention.

In addition to the two or more centered H-bonding, the non-covalently bonded unit in the thermally imageable compositions of the present invention further includes one or more additional secondary interactions, such as, van der Waals associations, hydrophobic

associations, ionic associations and a combination thereof. Furthermore, in addition to the two or more centered H-bonded units, the thermally sensitive supramolecular polymer itself can have additional intermolecular or intramolecular interactions, including intermolecular or intramolecular H-bonding.

Preferably, the thermally reversible non-covalently bonded unit in the top layer is a two-, three or four-centered H-bonded unit. In one embodiment, the thermally reversible non-covalently bonded unit includes a two-centered H-bonded unit, which includes two 2-pyridone groups. In another embodiment, the thermally reversible non-covalently bonded unit includes a three-centered H-bonded unit, which includes a cyclic imide group and a 2,6-diaminotriazine groups. In yet another embodiment, the thermally reversible non-covalently bonded unit includes a four-centered H-bonded unit, which includes two isocytosine groups.


To achieve developability, the thermally sensitive supramolecular polymer in the thermally imageable compositions must have at least one base-soluble functional group having a pKa of less than 14. Such base-soluble functional groups include, for example, carboxylic, sulfonic, imide, N-acyl sulfonamide and phenolic hydroxy groups.

The term "hydrocarbyl" in the context of the present invention refers to a linear, branched or cyclic alkyl, alkenyl, aryl, aralkyl or alkaryl of 1 to 22 carbon atoms, substituted derivatives thereof, wherein the substituent group is selected from halogen, hydroxy, hydrocarbyloxy, carboxyl, ester, ketone, cyano, amino, amido and nitro groups. Hydrocarbyl groups in which the carbon chain is interrupted by oxygen, nitrogen or sulfur are also included in the term "hydrocarbyl".

The term "hydrocarbylene" in the context of the present invention refers to a linear, branched or cyclic alkylene, vinylene, arylene, aralkylene or alkarylene of 1 to 22 carbon atoms, substituted derivatives thereof, wherein the substituent group is halogen, hydroxy, carboxyl, hydrocarbyloxy, ester, ketone, cyano, amino, amido and nitro groups. Hydrocarbylene groups in which the carbon chain is interrupted by oxygen, nitrogen or sulfur are also included in the term "hydrocarbylene".

Bifunctional compounds, which can associate into an oligomer or polymer by two centered H-bond units are disclosed in *J. Org. Chem.*, **53**, 5787-9 (1988). Supramolecular polymers based on three centered H-bond units are disclosed in *Macromolecules*, **28**, 782-83 (1995). The contents of these articles are incorporated herein by reference for all purposes. Representative of the compounds that can associate into an oligomer or polymer by two centered H-bond units are bridged bipyridone derivatives such as those disclosed in the previously incorporated *J. Org. Chem.*, **53**, 5787-9 (1988), provided that such systems have at least one base-soluble functional group, such as, carboxylic, sulfonic, imide, N-acyl sulfonamide or phenolic hydroxy groups.

The non-covalently bonded unit in this embodiment includes a bridged bipyridone derivative capable of forming a two-centered H-bond. The thermally sensitive supramolecular polymer in the first thermally imageable composition according to the present invention includes a supramolecular polymer derived from monomers represented by the formula:

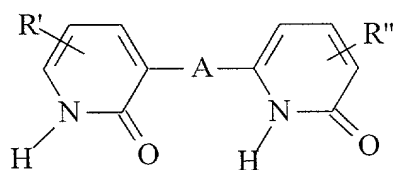

wherein each R' and R'' can independently be H, linear, branched or cyclic
 5 alkyl, aryl, aralkyl, alkaryl, substituted aryl, alkenyl, halogen, cyano, nitro,
 alkoxy, aryloxy, alkoxy carbonyl, amido, acyl, aminocarbonyl, carboxylic,
 sulfonic, imide, N-acyl sulfonamide or phenolic hydroxy, provided that at
 least one of the R' and R'' groups is carboxylic, sulfonic, imide, N-acyl
 sulfonamide or phenolic hydroxy. A can be a bridging group, such as,
 10 alkylene, arylene, aralkylene, alkarylene, substituted arylene, -O-, -S-,
 NR''', -CH=CH- or -C≡C-.

Representative of the compounds that can associate by three
 centered H-bond units are maleimide/styrene copolymers associated with
 15 4-vinyl-2,6-diaminotriazine/ styrene copolymers, such as those disclosed
 in the previously incorporated *Macromolecules*, **28**, 782-83 (1995),
 provided that such copolymers have at least one base-soluble functional
 groups, such as, carboxylic, sulfonic, imide, N-acyl sulfonamide or
 phenolic hydroxy groups.

20 The non-covalently bonded unit in this embodiment can be a group
 capable of forming one or more three centered H-bonds with another
 same or different such group to form a three centered H-bonded pair.

25 In one embodiment, the thermally sensitive supramolecular
 polymer in the first thermally imageable composition according to the
 present invention includes a supramolecular polymer derived from

5

10


15

20

The preferred polyfunctional materials include polyfunctional phenolic resins, acrylic resins, polyester resins, polyurethane resins, and combinations thereof. Preferably, the polyfunctional phenolic resin is a phenol/cresol novolak, polyvinyl phenol polymer, vinyl phenol/hydrocarbyl acrylate copolymer, pyrogallol/acetone polymer or a mixture thereof.

30

In a preferred embodiment, the thermally sensitive polymer in the top layer is a supramolecular polymer represented by the formula:

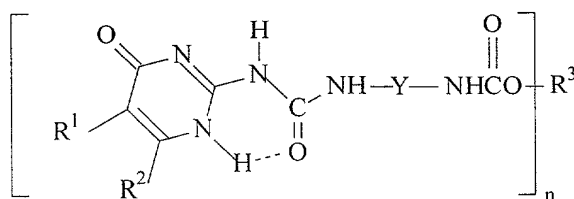

wherein each R^1 and R^2 is independently selected from the group consisting of: hydrogen and hydrocarbyl; Y is a hydrocarbylene derived from a diisocyanate represented by the formula $\text{Y}(\text{NCO})_2$; R^3 is a phenolic residue derived from a polyfunctional phenolic resin represented by the formula $\text{R}^3(\text{OH})_n$; and n is at least 1.

Preferably, the polyfunctional phenolic resin in the top layer is phenol/cresol novolak, polyvinyl phenol polymer, vinyl phenol/hydrocarbyl acrylate copolymer, pyrogallol/acetone polymer and a mixture thereof. The diisocyanates that are suitable for use in the top layer of the present invention include any diisocyanates, also referred to herein as “difunctional isocyanates.” Preferably, the diisocyanate is selected from isophorone diisocyanate, methylene-bis-phenyl diisocyanate, toluene diisocyanate, hexamethylene diisocyanate, tetramethylxylylene diisocyanate, dimers thereof, adducts thereof with diols, and mixtures thereof.

Because the polyfunctional phenolic resin in the top layer has n functional groups, up to n hydroxy groups can react with an equal number

of isocyanate functional groups, each attached to a site bearing a non-covalently bonded unit. Preferably, in the above-described supramolecular polymer n is 1, 2 or 3.

5 Thus, when $n=2$ in the above preferred embodiment, two hydroxy groups from a polyfunctional phenolic resin react with an equal number of isocyanate functional groups, each attached to a site bearing a non-covalently bonded unit, to produce a linear polymer in which the chain growth is the result of association of sites that are capable of four-centered hydrogen bonding to produce a quadruple hydrogen bonding unit.

10 When $n=3$, three hydroxy groups from a polyfunctional phenolic resin react with an equal number of isocyanate functional groups, each attached to a site bearing a non-covalently bonded unit, to produce a crosslinked polymer in which crosslinking is achieved through association of sites that are capable of four-centered hydrogen bonding to produce three quadruple hydrogen bonding units. Thus, the thermally sensitive supramolecular polymer can be crosslinked. Preferably, such crosslinks are thermally reversible.

20 Preferably, the thermally reversible non-covalently bonded unit in the bottom layer is a four-centered H-bonded unit, such as, a four-centered H-bond derived from two isocytosine groups. However, the thermally reversible non-covalently bonded unit in the bottom layer can also be a two- or three-centered H-bonded unit.


25 Preferably, the covalently bonded unit in the bottom layer is derived from a polymer, which is soluble or dispersible in an aqueous developer. To be soluble or dispersible in an aqueous developer, the polymer should have at least one base soluble functional group, such as, a hydroxyl

group, preferably an aromatic hydroxyl group, such as, a phenolic hydroxyl, a carboxylic acid, sulfonic acid, phosphoric acid, imide, N-acyl sulfonamide or a combination thereof.


- 5 The thermally sensitive polymer in the bottom layer can be formed by polymerizing a monomer mixture, which includes one or more of an ethylenically unsaturated monomer having a functional group, such as, hydroxyl, carboxylic acid, sulfonic acid, phosphoric acid or a combination thereof.

10

The ethylenically unsaturated monomer in the bottom layer can be compounds represented by the formula:

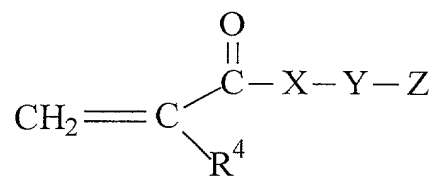

15

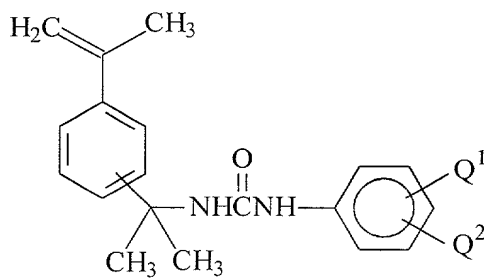

or a mixture thereof.

20



Each Q^1 and Q^2 in the formulas can independently be hydroxyl or carboxylic acid groups.

R^4 can be hydrogen, linear, branched or cyclic alkyl of 1 to 22 carbon atoms, linear, branched or cyclic substituted alkyl of 1 to 22 carbon atoms, aryl of 6 to 24 carbon atoms or substituted aryl of 6 to 24 atoms, wherein the substituent can be alkyl, aryl, halogen, keto, ester, alkoxy or cyano.


X can be O, S and NR^5 wherein R^5 is hydrogen, linear, branched or cyclic alkyl of 1 to 22 carbon atoms, linear, branched or cyclic substituted alkyl of 1 to 22 carbon atoms, aryl of 6 to 24 carbon atoms or substituted aryl of 6 to 24 atoms, wherein the substituent can be alkyl, aryl, halogen, keto, ester, alkoxy and cyano.

Y is linear, branched or cyclic alkylene of 1-22 carbon atoms, alkyleneoxyalkylene, poly(alkyleneoxy) alkylene, a ureido-containing group, such as, alkylene-NHCON(R^5)- or it can be a bond.




Z can be hydrogen, hydroxyl, carboxylic acid, or a group represented by the formula:





or



- 5 Examples of the ethylenically unsaturated monomers having one or more base soluble functional group include compounds represented by a the formula:

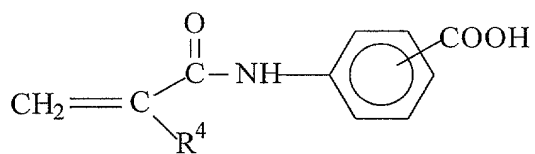


[illegible][illegible][illegible][illegible]


wherein P is a residue derived from a an n functional aqueous developer soluble or dispersible polymer represented by the formula $P(OH)_n$ wherein n is at least 1.

- 5 The above n functional aqueous developer soluble or dispersible polymer can be formed by polymerizing a monomer mixture, which includes one or more of an ethylenically unsaturated monomer having a functional group such as hydroxyl, preferably aromatic hydroxyl, such as, phenolic hydroxyls, carboxylic acid, sulfonic acid, phosphoric acid or a
10 combination thereof.

The above n functional aqueous developer soluble or dispersible polymers are preferably formed from the following ethylenically unsaturated monomers:

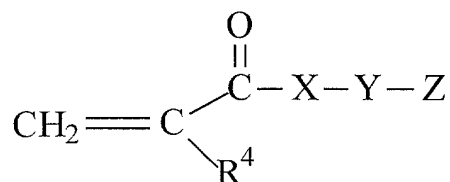

15

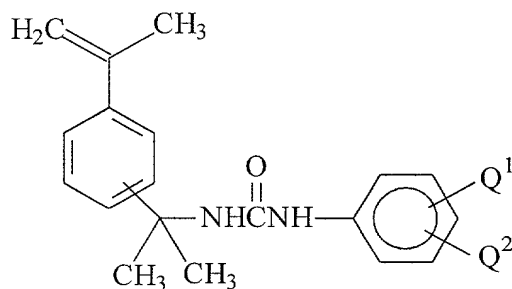

20

or a mixture thereof;



wherein each Q^1 and Q^2 is independently selected from the group consisting of: hydroxyl and carboxylic acid groups;

R^4 is hydrogen, linear, branched or cyclic alkyl of 1 to 22 carbon atoms, linear, branched or cyclic substituted alkyl of 1 to 22 carbon atoms, aryl of 6 to 24 carbon atoms or substituted aryl of 6 to 24 atoms, wherein the substituent is alkyl, aryl, halogen, keto, ester, alkoxy and cyano;


X is O, S and NR^5 wherein R^5 is hydrogen, linear, branched or cyclic alkyl of 1 to 22 carbon atoms, linear, branched or cyclic substituted alkyl of 1 to 22 carbon atoms, aryl of 6 to 24 carbon atoms or substituted aryl of 6 to 24 atoms, wherein the substituent is alkyl, aryl, halogen, keto, ester, alkoxy and cyano;

Y is linear, branched or cyclic alkylene of 1-22 carbon atoms, alkyleneoxyalkylene, poly(alkyleneoxy) alkylene or a bond; and


Z is hydrogen, hydroxyl, carboxylic acid, or a group represented by the formula:





or




- 5 Examples of the ethylenically unsaturated monomers having one or more base soluble functional group include compounds represented by a the formula:

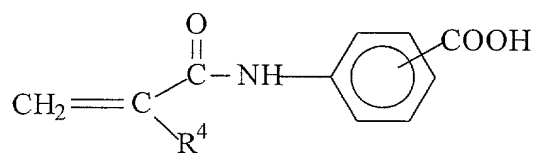

10

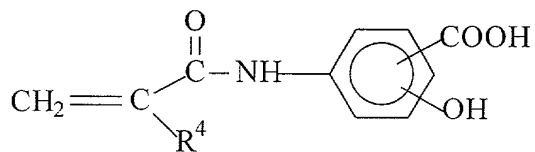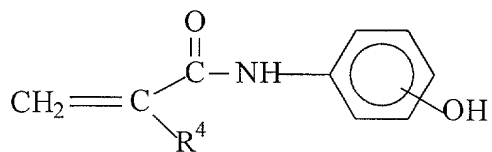

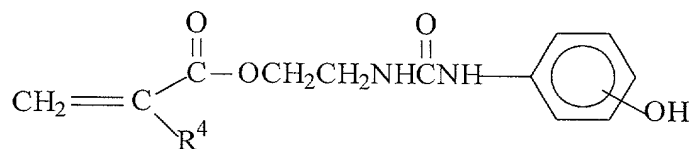

and a combination thereof.

- 5 The preferred ethylenically unsaturated comonomers include acrylic acid, methacrylic acid, acrylic acid ester, methacrylic acid ester, hydroxyethyl acrylate, hydroxyethyl methacrylate, hydroxypropyl acrylate, hydroxypropyl methacrylate, acrylamide, methacrylamide, N-methylacrylamide, N-methylmethacrylamide, acrylonitrile, methacrylonitrile, vinyl chloride, vinylidene chloride, vinyl acetate, vinyl ether, styrene, N-phenylmaleimide and a mixture thereof.
- 10

15 The diisocyanates that are suitable for use in the bottom layer of the present invention can be the same or different than the diisocyanates used in the top layer, and can include any diisocyanate. Preferably, the diisocyanate is selected from isophorone diisocyanate, methylene-bis-phenyl diisocyanate, toluene diisocyanate, hexamethylene diisocyanate, tetramethylxylylene diisocyanate, dimers thereof, adducts thereof with diols, and mixtures thereof.

20

25 In another preferred embodiment, the first and/or second thermally imageable composition of the present invention further includes a photothermal converter material.

- 30 The supramolecular polymer can be prepared by a process including the steps of:

contacting a hydrocarbyl-substituted isocytosine and a diisocyanate to produce an isocytosine/isocyanate mono-adduct; and

contacting the isocytosine/isocyanate mono-adduct and


(1) a polyfunctional material, such as, a polyfunctional phenolic resin, acrylic resin, polyester resin, polyurethane resin, and a combination thereof, for the top layer; or

5 (2) a polymer formed by polymerizing a monomer mixture, which includes one or more of an ethylenically unsaturated monomer having a functional group, such as, hydroxyl, carboxylic acid, sulfonic acid, phosphoric acid or a combination thereof, and optionally a comonomer, for the bottom layer;

10 wherein the contacting is carried out at a temperature and for a period of time sufficient to produce the supramolecular polymer.


Preferably, the hydrocarbyl groups in the above process are independently alkyl groups of 1 to 22 carbon atoms and the diisocyanate
15 is isophorone diisocyanate, methylene-bis-phenyl diisocyanate, toluene diisocyanate, hexamethylene diisocyanate, tetramethylxylylene diisocyanate, dimers thereof, adducts thereof with diols, or mixtures thereof. The polyfunctional phenolic resin can be phenol/cresol novolak, polyvinyl phenol polymer, vinyl phenol/hydrocarbyl acrylate copolymer,
20 pyrogallol/acetone polymer or a mixture thereof.

The isocytosine/isocyanate mono-adduct can be in a monomeric or quadruple hydrogen bonded dimeric form having a quadruple hydrogen bonded unit. The monomeric form is represented by the formula:

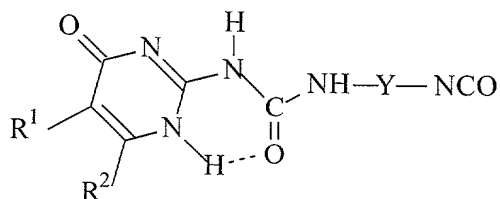


wherein each R^1 and R^2 can independently be hydrogen and hydrocarbyl;
 Y is a hydrocarbylene derived from a diisocyanate represented by the
 formula $Y(NCO)_2$, the diisocyanate being selected from isophorone
 diisocyanate, methylene-bis-phenyl diisocyanate, toluene diisocyanate,
 hexamethylene diisocyanate, tetramethylxylylene diisocyanate, dimers
 thereof, adducts thereof with diols, and mixtures thereof.

The dimeric form of the isocytosine/isocyanate mono-adduct has a
 structure resulting from association of the two sites capable of quadruple
 hydrogen bonding, namely two isocytosine units. The association of the
 two quadruple hydrogen bonding sites and the quadruple hydrogen
 bonded unit resulting therefrom, i.e., the 4-centered H-bonded unit, is
 schematically represented below for a related system in which the $-Y-$
 NCO group is replaced with the group $-CH_2CH_2CH_2-R$:

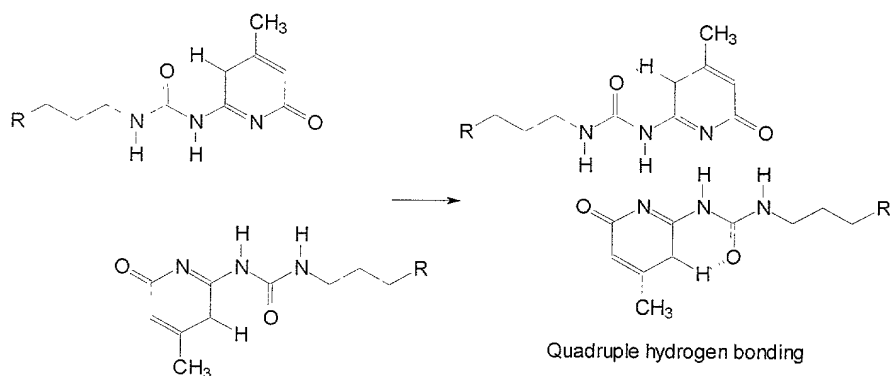

The isocytosine/isocyanate bis-adduct can be in a monomeric form or it can be in a quadruple hydrogen bonded oligomeric or polymeric form. The quadruple hydrogen bonded oligomeric or polymeric form results from association of two sites capable of quadruple hydrogen bonding, each from a different isocytosine/isocyanate bis-adduct, to produce an oligomer or polymer having repeating units of associated quadruple hydrogen bonding units, i.e., the 4-centered H-bonded units.

The monomeric form of the isocytosine/isocyanate bis-adduct is represented by the formula:


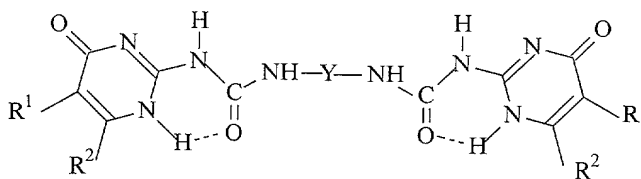


wherein each R^1 and R^2 can independently be hydrogen and hydrocarbyl and Y is a hydrocarbylene derived from a diisocyanate represented by the formula $Y(NCO)_2$.

Reaction of 1 mole of an isocytosine derivative with 1 mole of diisocyanate, such as isophorone diisocyanate, produces the isocytosine/isocyanate 1:1 adduct, which will spontaneously dimerize to form a dimeric mono-adduct having a thermally reversible 4-center H-bond. The resulting dimeric mono-adduct has free isocyanate groups on each end. This dimeric mono-adduct can then be used to form thermally reversible crosslinks with phenolic polymers. Any unreacted diisocyanate, such as isophorone diisocyanate, can also crosslink the phenolic polymers, however such crosslinking is not reversible.

To avoid crosslinking by the unreacted diisocyanate, an excess of isocytosine, i.e., about 10-20 % molar excess, is preferably used. Excess isocytosine can further react with the mono-adduct, which can also dimerize spontaneously to give a diisocyanate bis-adduct having two or more thermally reversible 4-center H-bonds.

Using "I" for the diisocyanate and "M" for isocytosine derivative, the reactions can be illustrated as follows:

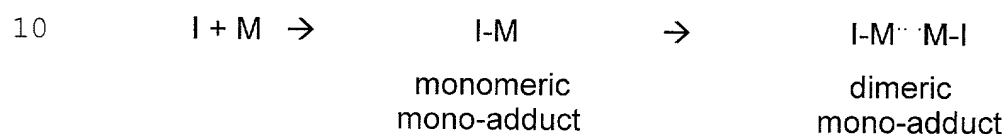

To maximize the formation of lower order adducts, isocytosine is added slowly to the diisocyanate to ensure that an excess diisocyanate is present at the early stages of the reaction.

The present invention is suitable for use in multilayer thermally imageable elements that are useful in lithographic printing, including lithographic printing plates that can be thermally imaged by imagewise exposure with a laser or a thermal printing head. The multilayer thermally imageable element is useful as a precursor for a lithographic printing member. In a multilayer thermally imageable system, the thermally imageable element has a top layer and a bottom layer. While different, the thermally sensitive supramolecular polymers of both the top and bottom layers include at least one covalently bonded unit; and at least one thermally reversible non-covalently bonded unit, which includes a two or

more centered H-bond within each of the non-covalently bonded units.

The top layer includes a thermally sensitive supramolecular polymer. The bottom layer includes one or more QHB-functionalized materials, including: (1) QHB-functionalized supramolecular polymers or copolymers
5 derived from polymerization or copolymerization of suitably functionalized monomers; and optionally (2) QHB-functionalized phenolic supramolecular polymers.

In their hydrogen bonded form, the QHB-functionalized top and
10 bottom layer polymeric materials are not very soluble in aqueous alkaline developer prior to exposure to heat. However, both top and bottom layers exhibit an increased solubility in an aqueous developer solution upon exposure to heat, i.e., they both become soluble in the aqueous alkaline developer following thermal exposure and thereby, they become
15 penetrable to the aqueous alkaline developer.

The bottom layer of the imageable element can further include a QHB-functionalized phenolic supramolecular polymer, such as, a polyfunctional phenolic resin, including a QHB-functionalized
20 phenol/cresol novolak, QHB-functionalized polyvinyl phenol polymer, QHB-functionalized vinyl phenol/hydrocarbyl acrylate copolymer, QHB-functionalized pyrogallol/acetone polymer or a mixture thereof.

Preferably, the bottom layer of the imageable element includes
25 both a QHB-functionalized phenolic supramolecular polymer and a QHB-functionalized supramolecular polymers or copolymers derived from polymerization or copolymerization of suitably functionalized monomers.

The bottom layer of the imageable element can still further include
30 an acrylic polymer, which can be formed by polymerizing one or more ethylenically unsaturated monomers and comonomers including

acrylic acid, methacrylic acid, acrylic acid ester, methacrylic acid ester, hydroxyethyl acrylate, hydroxyethyl methacrylate, hydroxypropyl acrylate, hydroxypropyl methacrylate, acrylonitrile, methacrylonitrile, acrylamide, methacrylamide, N-methylacrylamide, N-methylmethacrylamide, vinyl chloride, vinylidene chloride, vinyl acetate, vinyl ether, styrene, N-phenylmaleimide and a mixture thereof. More particularly, the bottom layer can contain a polymeric material, such as, a terpolymer of methacrylic acid, acrylamide and N-phenyl maleimide, which is not a supramolecular polymer.

In addition to the thermally imageable layer, the thermally imageable element can have additional layers, such as, an underlying layer.

Possible functions of an underlying layer include:

- (1) to enhance developability of the imagewise unexposed areas; and
- (2) to act as a thermal insulating layer for the imagewise exposed areas.

Such thermal insulating polymeric layer prevents otherwise rapid heat dissipation, for example, through the heat conducting aluminum substrate. This allows more efficient thermal imaging throughout of the thermally imageable layer, particularly in the lower sections. In accordance with these functions, the underlying layer should be soluble or at least dispersible in the developer and, preferably, have a relatively low thermal conductivity coefficient.

The thermally imageable element can further have an overlying layer. Possible functions of an overlying layer include:

(1) to prevent damage, such as scratching, of the surface layer during handling prior to imagewise exposure; and

(2) to prevent damage to the surface of the imagewise exposed areas, for example, by over-exposure which could result in partial ablation.

5 The overlying layer should be soluble, dispersible or at least permeable to the developer.

The present invention still further includes a method of producing an imaged element. The method includes the steps of:

10 providing a two-layer imageable element including a substrate, a top layer including a first thermally imageable composition including a first thermally sensitive supramolecular polymer according to the present invention and a bottom layer including a second thermally imageable composition including a second thermally sensitive supramolecular
15 polymer according to the present invention;

exposing the two-layer imageable element to thermal radiation to produce imagewise exposed regions; and

contacting the exposed two-layer imageable element and a developer within a period of time after the exposing step to remove the
20 exposed regions and thereby produce the imaged element.

Preferably, the method can further includes a photothermal converting material and the step of exposing the imageable element to thermal radiation is preferably carried out using an infrared laser, typically
25 for a period of time up to 1 hour, with a pixel dwell time of not more than 100 μ s.

The developer composition is dependent on the nature of the polymeric substance, but is preferably an aqueous composition. Common
30 components of aqueous developers include surfactants, chelating agents, such as, salts of ethylenediamine tetraacetic acid, organic solvents, such

as, benzyl alcohol, and alkaline components, such as, inorganic metasilicates, organic metasilicates, hydroxides and bicarbonates. Preferably, the aqueous developer is an alkaline developer containing inorganic metasilicates or organic metasilicates when the polymeric substance is a phenolic resin.

Typically, the step of exposing the imageable element to thermal radiation is carried out using an infrared laser. However, other methods such as visible or UV laser imaging may also be used, provided that a photoconverter, i.e., a photothermal converter, is present. Thus, for exposure with such visible or UV radiation sources, the composition generally includes a photothermal converting material.

The Applicants have unexpectedly discovered that despite the strong multi-centered H-bonding, it was possible to thermally reverse such bonding during IR laser exposure in which the pixel dwell time of the laser is less than 100 μ s. Thermally reversing the bonding by exposing at a pixel dwell time of not more than 100 μ s enables one to produce an imaged element economically and within a short period of time, thereby providing a significant cost advantage over methods that require exposures at a pixel dwell time of more than 100 μ s. Accordingly, the thermal radiation in the method of the present invention preferably has a pixel dwell time of not more than 100 μ s. Furthermore, despite the expected ease of reformation of strong multi-centered H-bonding, the Applicants have discovered surprisingly that, following exposure, it was possible to remove the exposed areas with an aqueous developer prior to reformation of the multi-centered H-bonded units.

A characteristic feature of this process is transiency of thermal solubilization in that developability decreases with time following exposure. Based on the examples, imageable elements should preferably

be developed within up to 1 hour, more preferably within up to 30 minutes, most preferably within up to 10 minutes following exposure. For example, in the case of infrared laser imaging, the period of time between the steps of exposing and treating with a developer is preferably less than about 10
5 minutes. As mentioned above, the method of the present invention can be used in one or two layer systems.

In the two layer systems, the bottom layer is soluble or dispersible in a developer, whereas the top layer is insoluble in the developer.
10 Imagewise thermal exposure of such composite layer increases the rate of removal of the exposed areas of both layers.

The rate of removal of the exposed areas can be increased by enhanced rate of dissolution or dispersibility of the bottom layer and by
15 enhanced permeability of the top layer. The supramolecular polymers of the present invention can be used in the top layer.

The thermally imageable element of the present invention is useful in digital imaging applications, including printing plates and printed circuit
20 boards.

Synthetic route:

The synthetic route describes in detail the synthesis of "RESIN A".
25 Further syntheses were undertaken to produce "RESIN B" and "RESIN C" as described in table A.

Synthesis of the quadruple hydrogen bonding entity (QHBE)

Stage 1

5

Into a 250 ml flask were added 100 g of dried tetrahydrofuran (THF) and 13.78 g (0.11mole) of dried 6-methylisocytosine. To this mixture was added 22.24 g (0.1 mole) of isophorone diisocyanate and the flask sealed from atmospheric moisture with a conical stopper. The mixture was left at ambient temperature for five days. The resulting mixture represented 0.1 mole of the quadruple hydrogen bonding entity, which would then be reacted with polymers containing phenolic –OH functionality (see *Science*, **278**, 1601-1604 (1997) and in *J. Polym. Sci., Part A: Polym. Chem.*, **37**, 3657-3670 (1999).

15


Stage 2

110.75 g of Bakelite resin LB6564 was dissolved into 400 g of dried tetrahydrofuran (THF) in a 1 litre flask and 40% of the stage 1 mixture (0.04moles of QHBE) added slowly with stirring. Slow stirring was continued for 1 – 2 days at ambient temperature. The mixture was tested for isocyanate functionality using FT-IR. The reaction was considered to be complete when the presence of an isocyanate functionality could no longer be detected by Infrared Spectroscopy (IR).


25

Chemical Reactions: Preparation of QHB-functional phenolic resin

The QHB-functional phenolic resin and quadruple H-bonded unit resulting therefrom are represented schematically below. Phenolics having 2 QHB units will undergo chain extension, whereas phenolics having 3 or more QHB units are capable of undergoing crosslinking.

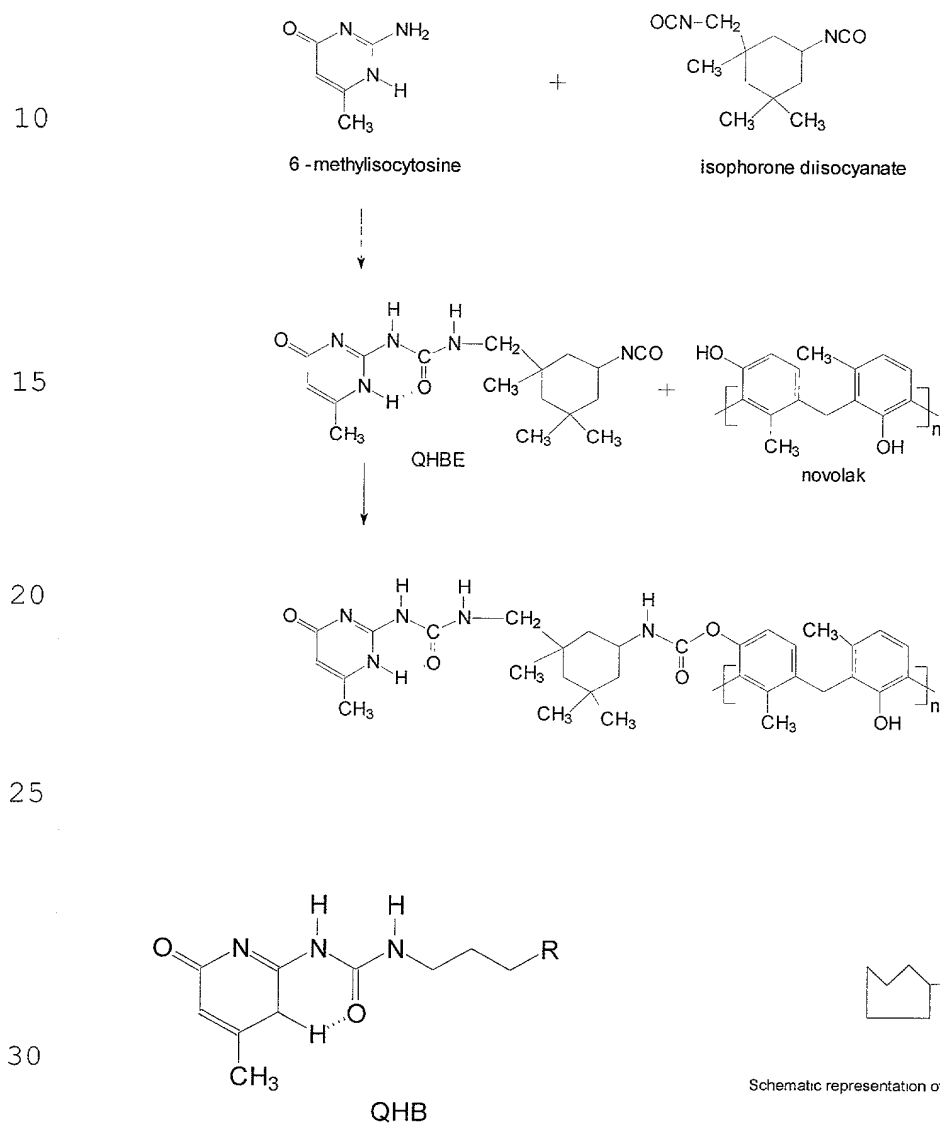

The QHB group can form a four centered H-bond as shown below:

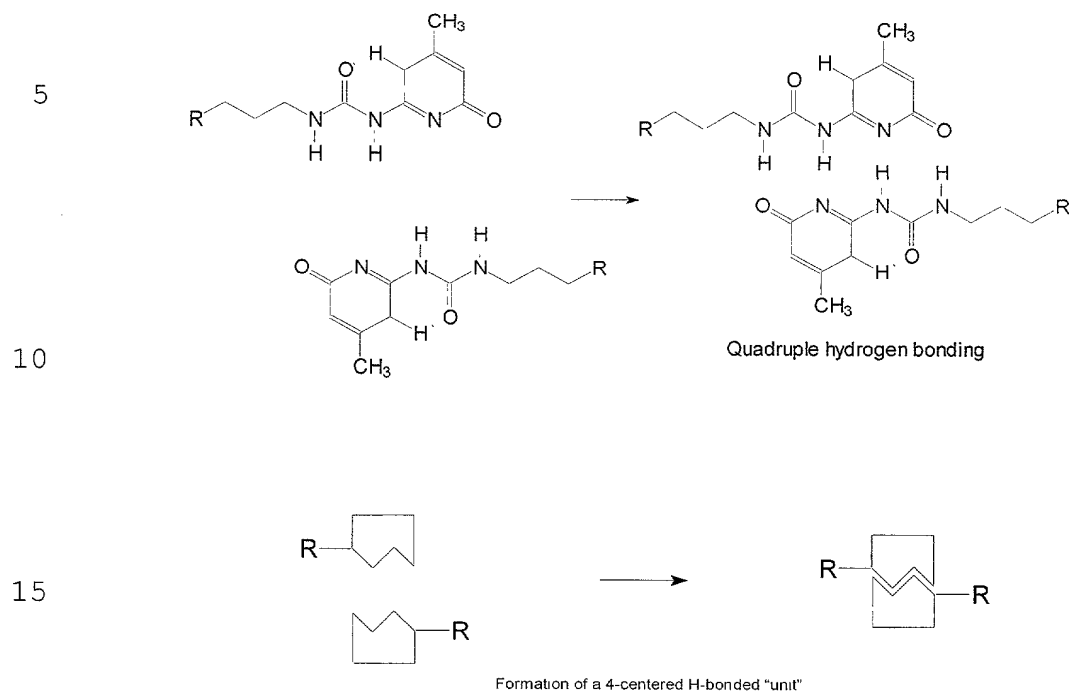

Isolation of the QHB polymer

20

The product was isolated by precipitation into water. The mixture was slowly poured as a thin stream into 5 litres of vigorously stirred distilled water using a Silverson/Rotamix mixer. Initially, the product precipitated as a sticky viscous mass, but tended to harden and crumble with further stirring as the tetrahydrofuran (THF) was extracted from the polymer. The aqueous phase was decanted and replaced with fresh water and left over-night. The mixture was again vigorously stirred to form a fine precipitate, which was washed with water while being filtered, using a Buchner funnel. The damp cake was crumbled into a drying tray and dried at 40°C until constant weight was obtained.

25


30

Table A

Resin	LB6564	Lyncur M(S-1)	Lyncur CBA
Phenolic Resin (equiv. wt)	116.43	108.14	262.15
Phenolic Resin (equivalents)	0.9512	0.476	0.238
Resin weight (g)	110.75	51.43	62.34
QHBE (moles)	0.04	0.02	0.01
QHBE weight (g)	13.91	6.954	3.477
QHBE Solvent	T.H.F.	T.H.F.	T.H.F.
PHENOL/QHBE equiv ratio	23.78	23.78	23.78
Solvent	T.H.F.	T.H.F.	T.H.F.
Solvent weight (g).	400	200	250
Yield (g).	119.7	32	46.4
Batch name	RESIN A	RESIN B	RESIN C

5 **Definitions:**

1. LB6564: a phenol/cresol novolak marketed by Bakelite, UK.
2. M(S-1): Lyncur M(S-1), a polyvinylphenol polymer having Mw = 1600 to 2400 and Mn = 1100 to 1500, as supplied by Siber Hegner, Beckenham, UK.
3. CBA: Lyncur CBA (PVPh-butylacrylate), a copolymer of polyvinylphenol having the structure:

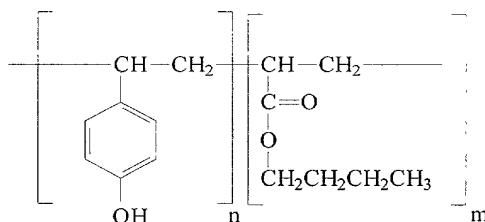

$$n/m = 8/2 - 6/4, \text{ Mw} = 10\,000 - 30\,000$$


$$\text{Mn} = 5000 - 5500$$

4. RESIN A: the resin obtained when 110.75 g of LB6565 is reacted with 13.91 g of QHBE.


5. RESIN B: the resin obtained when 51.43 g of M(S-1) is reacted with 6.954 g of QHBE.

6. RESIN C: the resin obtained when 62.34 g of Lyncur CBA resin is reacted with 3.477 g of QHBE.

7. KF654B PINA: an IR dye as supplied by Riedel de Haan Ltd, Middlesex, UK, having the following structure:

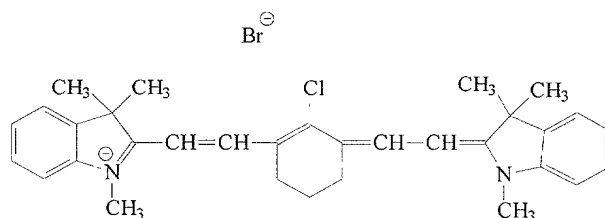


8. IR dye B: an IR dye having the structure:

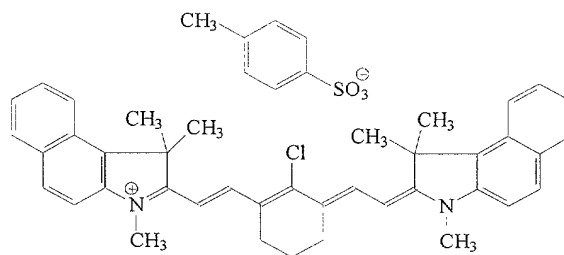

9. Crystal violet: basic violet 3, C.I. 42555, Gentian violet, as supplied by Aldrich Chemical Company, Dorset, UK.

10. Oxonol Blue: a blue dye having the structure:

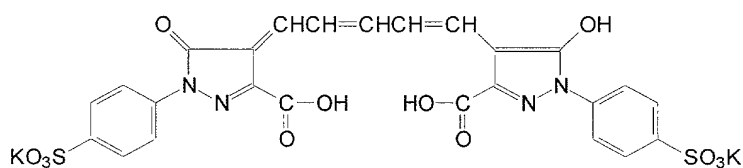

11. Paris Blue: a blue pigment supplied by Kremer Pigmente, Aichstetten, Germany.

12. Developer A: 14%wt sodium metasilicate pentahydrate in water.

13. Developer B: 0.2M NaOH in water.

14. Copper substrate A: double sided copper laminate of overall thickness 254 microns, having copper cladding 18 microns thick on each side of an insulating substrate, catalogue number N4105-2, 0.008, H/H THE, as supplied by New England Laminates (UK) Ltd of Skelmersdale, UK. The copper substrate is then brush grained using a mechanical grainer, stock number 4428, supplied by PCB machinery Ltd, Haslingden, Rossendale, UK, rinsed with distilled water for 10 seconds and allowed to air dry, prior to coating.

15. Etching solution A: Ferric chloride hexahydrate crystals, catalogue no. 551-227 as supplied by RS components, Corby, UK.

16. Stripper A: Catalogue no. 690-855 as supplied by RS components.

Plate examples and press test result:

Formulation A and B solution concentrations were selected to provide the specified dry film compositions with coating weights of 2 g/m^2 after thorough drying, at 100°C for 90 seconds in a Mathis oven. In each case the substrate used was an aluminum sheet that had been electrograined and anodised and post-anodically treated with an aqueous solution of an inorganic phosphate. The coating solutions were coated onto the substrate by use of a wire wound bar.

For formulation A, RESIN A (see Table A) and IR dye B were used in the ratio of 98:2 (w:w). For formulation B, Paris Blue, and RESIN A (at a ratio of 1:4, w:w) were ball milled together for 4 days such that the dispersed mill base had a solids content of 30 wt% in 1-methoxypropan-2-ol and a particle size of <10 microns as determined by grind gauge. Thus, the formulation B coating was prepared as a solution on 1-methoxypropan-2-ol.

	<u>Formulation</u>	
	A	B
	<u>Parts by Weight</u>	
RESIN A	98	80
IR dye B	2	
Paris Blue		20

The precursors were imaged using an internal test pattern, on a Creo Trendsetter at an imaging energy density of 250 mJ/cm². They were then processed using a Kodak Polychrome Graphics Mercury Mark V processor containing developer A at 22.5°C at a process speed of 750 mm/min. Performance was assessed by comparing actual screen densities with expected densities using a Gretag D19C densitometer (available from Colour Data Systems Ltd, The Wirral, UK)

Density Results:

Expected Dot Readings / %	Actual Dot Readings /%	
	Formulation A	Formulation B
2	2	1
5	6	5

10	10	10
20	21	20
30	31	30
40	40	40
50	51	50
60	57	59
70	72	69
80	81	79
90	92	90
95	97	95

The printing forms were press tested on a Heidelberg Speed
 Master 52 printing press, using Duo laser 80 g paper, Gibbons Geneva A1
 5 colour ink and a standard fount solution (including 87% water, 10.5%
 isopropyl alcohol and 2.5% Goldfount surfactants). Each printing form ran
 cleanly, with no inking in background areas. Density tests were carried
 out on the solid image areas (100% screen areas) at a range of
 runlengths. Formulations A and B maintained 100% screen density
 10 beyond 23,500 impressions and the plates ran cleanly on press. There
 was no evidence of coating failure throughout the printing test.

Latent image stability:

15 Coating formulation C was prepared as a solution in 1-
 methoxypropan-2-ol. The solution concentration was selected to provide
 the specified dry film composition of 2% IR dye B and 98% RESIN A with
 a coating weight of 2 g/m² after thorough drying at 100°C for 90 seconds.
 The precursor was then imaged using an internal test pattern with 100%
 20 coverage, on a Creo Trendsetter 3244 at an imaging energy density of
 220 mJ/cm². Next, separate samples of this precursor were cut up and

the time between imaging and developing was increased (0, 1, 2, 3 and 4 hours). Additional samples were stored at elevated temperature (40°C) for 0, 4 and 21 hours. Samples were then processed using a Kodak Polychrome Graphics Mercury Mark V processor containing developer A at 22.5°C at a process speed of 750 mm/min. In this way, the latent image stability of the formulation was evaluated using a Gretag densitometer.

Latent Image Stability Results, room temperature storage:

Formulation C	<u>Time between imaging and developing / hours</u>				
	0	1	2	3	4
Expected dot readings / %	Actual dot readings / %				
0	0	62	70	86	96

Latent Image Stability Results, 40°C storage:

Formulation C	<u>Time between imaging and developing / hours</u>		
	0	4	21
Expected dot readings / %	Actual dot readings / %		
0	0	100	100

Developer resistance tests:

The solution concentrations were selected to provide the specified dry film compositions with coating weights of 2 g/m² after thorough drying, at 100°C for 90 seconds in a Mathis oven. In each case the substrate used was an aluminum sheet that had been electrograined and anodised and post-anodically treated with an aqueous solution of an inorganic phosphate. The coating solutions were coated onto the substrate by use of a wire wound bar.

	<u>Formulation</u>		
	D	E	F
	<u>Parts by Weight</u>		
RESIN A	98	98	100
IR dye B	2		
Oxonol Blue		2	

	<u>Formulation</u>		
	G	H	I
	<u>Parts by Weight</u>		
RESIN B	98	98	100
IR dye B	2		
Oxonol Blue		2	

[illegible][illegible][illegible]

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480	2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491	2492	2493	2494	2495	2496	2497	2498	2499	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509	2510	2511	2512	2513	2514	2515	2516	2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527	2528	2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539	2540	2541	2542	2543	2544	2545	2546	2547	2548	2549	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569	2570	2571	2572	2573	2574	2575	2576	2577	2578	2579	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589	2590	2591	2592	2593	2594	2595	2596	2597	2598	2599	2600	2601	2602	2603	2604	2605	2606	2607	2608	2609	2610	2611	2612	2613	2614	2615	2616	2617	2618	2619	2620	2621	2622	2623	2624	2625	2626	2627	2628	2629	2630	2631	2632	2633	2634	2635	2636	2637	2638	2639	2640	2641	2642	2643	2644	2645	2646	2647	2648	2649	2650	2651	2652	2653	2654	2655	2656	2657	2658	2659	2660	2661	2662	2663	2664	2665	2666	2667	2668	2669	2670	2671	2672	2673	2674	2675	2676	2677	2678	2679	2680	2681	2682	2683	2684	2685	2686	2687	2688	2689	2690	2691	2692	2693	2694	2695	2696	2697	2698	2699	2700	2701	2702	2703	2704	2705	2706	2707	2708	2709	2710	2711	2712	2713	2714	2715	2716	2717	2718	2719	2720	2721	2722	2723	2724	2725	2726	2727	2728	2729	2730	2731	2732	2733	2734	2735	2736	2737	2738	2739	2740	2741	2742	2743	2744	2745	2746	2747	2748	2749	2750	2751	2752	2753	2754	2755	2756	2757	2758	2759	2760	2761	2762	2763	2764	2765	2766	2767	2768	2769	2770	2771	2772	2773	2774	2775	2776	2777	2778	2779	2780	2781	2782	2783	2784	2785	2786	2787	2788	2789	2790	2791	2792	2793	2794	2795	2796	2797	2798	2799	2800	2801	2802	2803	2804	2805	2806	2807	2808	2809	2810	2811	2812	2813	2814	2815	2816	2817	2818	2819	2820	2821	2822	2823	2824	2825	2826	2827	2828	2829	2830	2831	2832	2833	2834	2835	2836	2837	2838	2839	2840	2841	2842	2843	2844	2845	2846	2847	2848	2849	2850	2851	2852	2853	2854	2855	2856	2857	2858	2859	2860	2861	2862	2863	2864	2865	2866	2867	2868	2869	2870	2871	2872	2873	2874	2875	2876	2877	2878	2879	2880	2881	2882	2883	2884	2885	2886	2887	2888	2889	2890	2891	2892	2893	2894	2895	2896	2897	2898	2899	2900	2901	2902	2903	2904	2905	2906	2907	2908	2909	2910	2911	2912	2913	2914	2915	2916	2917	2918	2919	2920	2921	2922	2923	2924	2925	2926	2927	2928	2929	2930	2931	2932	2933	2934	2935	2936	2937	2938	2939	2940	2941	2942	2943	2944	2945	2946	2947	2948	2949	2950	2951	2952	2953	2954	2955	2956	2957	2958	2959	2960	2961	2962	2963	2964	2965	2966	2967	2968	2969	2970	2971	2972	2973	2974	2975	2976	2977	2978	2979	2980	2981	2982	2983	2984	2985	2986	2987	2988	2989	2990	2991	2992	2993	2994	2995	2996	2997	2998	2999	3000
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

H	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed
I	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed
J	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed
K	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed
L	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed	All coating removed

“Coating visible” = coating is unattacked by developer

“Some coating left” = coating is partially dissolved by developer

“All coating is removed” = developer has dissolved coating away

1 Day old plates, stored at ambient (non-imaged):

	Time exposed to developer / s								
	120	150	180	210	240	270	300	330	360
Formulation									
D	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left	Some coating left	Some coating left	Some coating left	All coating removed
E	Some coating left	Some coating left	Some coating left	Some coating left	Some coating left	Some coating left	All coating removed	All coating removed	All coating removed
F	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left	All coating removed	All coating removed	All coating removed

All coating was removed from Formulations G through L.

5 **5 Day old plates, stored at ambient (non-imaged):**

	<u>Time exposed to developer / s</u>								
	120	150	180	210	240	270	300	330	360
Formulation									
D	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left
E	Coating visible	Coating visible	Coating visible	Some coating left	Some coating left	Some coating left	Some coating left	Some coating left	Some coating left
F	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left	Some coating left	Some coating left

10 All coating was removed from Formulations G through L.

15 **3 Day old plates, stored at 40°C (non-imaged):**

	<u>Time exposed to developer / s</u>								
	120	150	180	210	240	270	300	330	360
Formulation									
D	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible
E	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left	Some coating left	Some coating left	Some coating left

F	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible
---	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------

All coating was removed from Formulations G through L.

5

6 Day old plates, stored at 40°C (non-imaged):

	<u>Time exposed to developer / s</u>								
	120	150	180	210	240	270	300	330	350
Formulation									
D	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible
E	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Some coating left	Some coating left	Some coating left	Some coating left
F	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible	Coating visible

10

Formulations G through I were not tested. All coating was removed from Formulations J through L.

As shown in Table A, the QHBE/phenol group equivalent ratio is about 1/24 in these formulations. Developer resistance as a function of QHBE level was also determined, using a series of derivatives of LB6564 of different QHB level shown in the table below and compared with unmodified LB6564.

20

QHBE:phenolic OH ratio (LB6564)	01:05	01:08.4	01:14	01:24	01:40	LB6564
Resin %	98	98	98	98	98	98

IR dye B %	2	2	2	2	2	2
Goldstar removal time (seconds)	>300	>300	>300	180	70	5

These results show that increasing levels of QHBE enhance developer resistance. Accordingly, those skilled in the art will be able to adjust the QHB/Resin ratio to provide an appropriate resistance for resins used in practicing the present invention, such as resins C and D.

2-Layer Plate Example with QHB in the Top Layer

Stage 1:

Synthesis of the Quadruple Hydrogen Bonding Entity (QHBE):

Dry 6-methylisocytosine (13.78 g) (0.11 mole) and dry 2-butanone (MEK) (100 g) were charged into a 250-mL flask under N₂ atmosphere. With the temperature held constant at 30°C, isophorone diisocyanate (22.24 g) (0.1 mole) was added dropwise, after which the temperature was raised to 45°C and the reaction was continued for 8 hr. The % unreacted NCO was determined by titration to be 13.0 (11.7 theoretical), corresponding to 0.1 mole QHBE (26.5% solids).

Stage 2:

Preparation of QHB-Functional Phenolic Resin:

Novolac resin LB-6564 (110.8 g) and tin octoate (0.4 g) were dissolved in dry MEK in a 1-L flask, followed by the addition of QHBE (48.5 g, corresponding to 40 wt% of the stage 1 product) (0.04 mol) over a

period of 1 hr with stirring. After heating under N₂ for 8 hr at 80°C, all of the NCO functionality was reacted, as determined by titration.

The MEK was removed by rotary evaporation and replaced by 2-methoxyethanol (100 g). The resulting mixture was slowly poured as a thin stream into distilled water (5 L), which was vigorously stirred using a Silverson/Rotamix mixer. The resulting damp cake was dried at 40°C to provide the QHB-functional phenolic resin, UR 4309.

10 Plate Preparation and Evaluation

A formulation of copolymer ACR-1478 (described below) (4.25 g) and IR dye B (0.75 g), dissolved in a mixture of dioxalane (43 g), methanol (43 g) and methyl lactate (14 g) was spin coated onto a lithographic aluminum substrate to provide a dry coating wt of 1.4 g/m². The plate substrate had been electrolytically grained, anodized and hydrophilized with polyvinyl phosphonic acid prior to coating.

A solution of the QHB-phenolic resin UR 4309 (3 g) in a mixture of toluene (70 g) and 2-methoxypropanol (30 g) was spin coated onto the above coated substrate to provide a second layer, having a dry coating wt of 0.7 g/m².

The composite printing plate precursor was further dried for at 95°C for 3 min and imagewise exposed to a dose of 150 mJ/cm², using a Creo trendsetter 3244 at a 10W power setting. The imaged plate precursor was processed in a PC32 processor (available from Kodak Polychrome Graphics), using Kodak Polychrome Graphics developer 956.

One pass through the processor at a speed of 2 m/min resulted in complete removal of the imagewise exposed areas and provided the imaged plate having an excellent image and a clean background.

5 The image quality remained good after a second pass through the processor, which demonstrated good processor latitude. The plate precursor was also shown to be white-light safe.

Preparation of Copolymer ACR-1478

10 Dioxalane (75 g), 95% ethanol (75 g), methacrylic acid (14.7 g), N-phenylmaleimide (59.1 g) and methacrylamide (26 g), followed by dioxalane (75 g) and ethanol (75 g), were charged into a 4-neck, 4-L flask, equipped with a mechanical stirrer, condenser, temperature controller and
15 nitrogen purge. The reaction mixture was heated to 60°C, using a heating mantle. Azo-bis-isobutyronitrile (Vazo-64, from DuPont) (0.135 g) was added and the reaction was maintained at 60°C for 22 hr. After cooling to room temperature, the reaction mixture was slowly poured onto a mixture
20 of ethanol (1.22 kg) and distilled water (250 g) contained in a 2-gallon plastic container over a period of 45 min and then stirred for 30 min. The precipitated product was filtered, re-suspended in ethanol (920 g), filtered and dried at 40°C overnight.

25 The ACR-1478 copolymer of methacrylic acid : N-phenylmaleimide : methacrylamide (20.9 : 41.6 : 37.4 mol%) exhibited an acid number of about 96.

PCB Example:

30 The coating formulation M was prepared as a solution in 1-methoxypropan-2-ol / DMF (75% : 25%, v:v). The substrate used was

copper substrate A. The coating solution was coated onto one side of the copper substrate by means of a wire wound bar. The solution concentration was selected to provide the specified dry film composition with a coating weight of 4 g/m² after thorough drying at 130°C for 150 seconds.

Coating Formulation M

Component	Parts by Weight
RESIN BB	40
CBA, 30k	57.65
Crystal violet	1
KF654B	1.35

A sample of the printed circuit board precursor was imaged on the Trendsetter 3244, using the internal test pattern, plot 0 at 400 mJ/cm². The exposed precursor was then processed by immersion in developer B for 30 seconds at 20°C. At this imaging and developing condition, the 50% dots laid down by the imagesetter were complete 50% dots on the substrate.

The precursor was then etched (uncovered copper removed) by immersion in the etching solution A, diluted with water (50% w:w) which was constantly being stirred, for between 5 and 10 minutes at 40°C. The precursor was then rinsed with water.

Finally, the precursor was cleaned by immersion in Stripper A diluted with water (20% w:w) (to remove the remaining coating) at 20°C for 60 seconds. The printed circuit board sample had a copper pattern

5 2-Layer Plate Example with QHB in the Bottom Layer

10

[illegible]

QHB-functional Cresol Novolak (RESIN 1)	2.0	2.0	2.0	2.0	2.0	7.0		
Acrylic Resin (RESIN AA)	5.0							
QHB-functional Acrylic Resin (RESIN BB)		5.0						
QHB-functional Acrylic Resin (RESIN CC)			5.0					
QHB-functional Acrylic Resin (RESIN DD)				5.0				
QHB-functional Acrylic Resin (RESIN EE)					5.0		5.0	
Cresol Novolak							2.0	7.0
D-11	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
DC190 (10% PGME sol.)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
KF654 (pts)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

Stage 1

5 **Synthesis of 6-Methylisocytosine**

Into a 1 liter flask 600 ml of dried Ethanol and 91.89 g (0.51 mol) of Guanidine Carbonate and 146.1 g (1.11 mol) of ethyl acetoacetate were added. The reaction solution was gradually heated to reflux temperature and stirred overnight. 300ml of Ethanol was evaporated and reaction

solution was heated under reflux for two hours. After cooling, 300 ml of Hexane was added. Deposit was filtered, washed and dried. 119.3 g of 6-methylisocytosine was obtained.

5 **Synthesis of the Quadruple Hydrogen Bonding Entity (QHBE)**

Into a 300 ml flask 200 g of dried N,N-dimethylacetamide (DMA) and 27.56 g (0.22 mol) of 6-methylisocytosine were added. To this mixture 46.65 g (0.21 mol) of isophorone diisocyanate was added and the flask was sealed from atmospheric moisture with a conical stopper. The mixture was left at ambient temperatures for five days.

Stage 2

15 **Synthesis of QHB-functional m/p-Cresol Novolak (RESIN 1)**

27.7 g of m/p-cresole novolak (m/p ratio of 6:4; weight average molecular weight: 5,600) was dissolved into 100 ml of dried N,N-dimethyl acetamide in a 200 ml flask. 40% of the stage 1 mixture (0.04 mole of QHBE) and 0.05 g of di-n-butyltin dilaurate were added slowly with stirring. Stirring was continued for 1 day at 80 °C. The mixture was tested for isocyanate functionality using back titration by addition of N,N-dibutylamine. The mixture was poured into 1 liter of water. The deposit was filtered, washed and dried to produce 27.8 g of QHB-functional m/p-cresol novolak.

Synthesis of QHB-functional m-Cresol Novolak (RESIN 2)

27.7 g of m-cresole novolak (weight average molecular weight: 5,300) was dissolved into 100 ml of dried N,N-dimethyl acetamide in a 200 ml flask. 40% of the stage 1 mixture (0.04 mole of QHBE) and 0.05 g of

di-n-butyltin dilaurate were added slowly with stirring. Stirring was continued for 1 day at 80 °C. The mixture was tested for isocyanate functionality using back titration by addition of N,N-dibutylamine. The mixture was poured into 1 liter of water. The deposit was filtered, washed and dried to produce 31.07 g of QHB-functional m-cresol novolak.

Stage 3

Synthesis of N-(4-Carboxyphenyl)methacrylamide (MONOMER 1)

Into a 1 liter flask 600 ml of acetonitrile, 95.2 g (1.1 mol) of methacrylic acid and 120.1 g (1.1mol) of chloroformic acid ethyl ester were added. To this mixture 111.8 g (1.1 mol) of triethylamine was added over a period of 1 hour in a cold bath. Stirring was continued for 1 hour at room temperature. 137.1 g (1 mol) of 4-aminobezoic acid was added to the mixture. The mixture was heated for 2 hours at 50 °C. The mixture was poured into 5 liter of 1% HCl solution. The deposit was filtered, washed and dried to produce 170.9 g of N-(4-carboxyphenyl)-methacrylamide.

Synthesis of 2-(N'-(4-Hydroxyphenyl)ureido)ethylmethacrylate (MONOMER 2)

Into a 1 liter flask 500 g of N,N-Dimethyl acetamide and 173.5 g (1.6 mole) of p-aminophenol were added. This mixture was placed in cold bath and 234.9 g (1.5 mole) of methacryloyl oxyethyl isocyanate was added over a period of 1 hour. After the addition was complete, stirring was continued for 5 hours at room temperature. The mixture was tested for isocyanate functionality using IR spectroscopy. 30 ml of concentrated HCl was added to the mixture and was stirred for 15 minutes. The mixture was poured into 4.5 liter of water. The deposit was filtered, washed and

dried to produce 370 g of 2-(N'-(4-hydroxyphenyl)ureido)ethyl methacrylate.

Synthesis of N-(3-Carboxy-4-hydroxyphenyl)methacrylamide (MONOMER 3)

Into a 1 liter flask were added 600 ml of acetonitrile, 95.2 g (1.1 mol) of methacrylic acid and 120.1 g (1.1 mol) of chloroformic acid ethyl ester. To this mixture 111.8 g (1.1 mol) of triethylamine was added over a period of 1 hour in a cold bath. Stirring was continued for 1 hour at room temperature and 141.2 g (1 mol) of 5-aminosalicylic acid was added. The mixture was heated for 2 hours at 60 °C. The mixture was poured into 5 liter of 1% HCl solution. The deposit was filtered, washed and dried to produce 164.7 g of N-(3-carboxy-4-hydroxyphenyl)methacrylamide.

Synthesis of N-(4-Hydroxyphenyl)methacrylamide (MONOMER 4)

Into a 1 liter flask 600 ml of acetonitrile, 95.2 g (1.1 mol) of methacrylic acid and 120.1 g (1.1 mol) of chloroformic acid ethyl ester were added. To this mixture 111.8 g (1.1 mol) of triethylamine was added over a period of 1 hour in cool bath. Stirring was continued for 1 hour at room temperature and 120.0 g (1mol) of p-aminophenol was added. The mixture was heated for 5 hours at 50 °C. The mixture was poured into 5 liter of 1% HCl solution. The deposit was filtered, washed and dried to produce 99.35 g of N-(4-Hydroxyphenyl)methacrylamide.

Stage 4

Synthesis of Acrylic Resin AA (RESIN AA)

Into a 200ml flask 46.7 g of N,N-dimethylacetamide was added and heated at 85 °C. Then, 0.15 g of AIBN was added under a nitrogen atmosphere. A mixture of 46.7 g of N,N-Dimethylacetamide, 15.6 g of N-(4-Carboxyphenyl)methacrylamide, 18.5 g of acrylonitrile, 1.5 g of methacrylamide, 1.5 g of phenylmaleimide and 0.45 g of AIBN was added over a period of 1 hour. The mixture was then heated at 100 °C and 0.15 g of AIBN was added at intervals of 1 hour till viscosity B~C (Gardner density) was obtained. The mixture was poured into 1.5 liter of water, the deposit was filtered, washed and dried to produce 34.25 g of acrylic resin AA (Acid Value:115).

Synthesis of QHB-functional Acrylic Resin BB (RESIN BB)

Into a 200 ml flask 46.7 g of N,N-dimethyl acetoamide was added and heated to 85 °C. Under nitrogen atmosphere 0.15 g of AIBN was added. Next, a mixture of 46.7 g of N,N-dimethyl acetamide, 16.7 g of N-(4-carboxyphenyl)methacrylamide, 16.7 g of acrylonitrile, 1.7 g of phenylmaleimide, 2.0 g of 2-(N'-(4-hydroxyphenyl)ureido)ethyl methacrylate and 0.45 g of AIBN was added over a period of 1 hour. After the addition was complete, the mixture was heated to 100 °C and 0.15 g of AIBN was added at 1 hour intervals till a viscosity of B~C (Gardner density) was obtained. The mixture was cooled to 80 °C. 4.3 g of QHBE solution, 0.05 g of di-n-butyltin dilaurate and 0.1 g of triethylamine were added and the mixture was allowed to react for 8 hours. The progress of the reaction was monitored using GPC by determining the amount of isocyanate functionality present in the mixture. When the reaction was complete, the mixture was poured into 1.5 liter of water. The deposit was filtered, washed and dried to produce 32.7 g of QHB-functional acrylic resin BB (Acid Value: 115).

Synthesis of QHB-functional Acrylic Resin CC (RESIN CC)

Into a 200 ml flask 46.7g of N,N-Dimethylacetamide was added and heated at 85 °C. 0.15 g of AIBN was added under a nitrogen atmosphere.

5 A mixture of 46.7 g of N,N-dimethylacetamide, 14.5 g of N-(4-carboxyphenyl)methacrylamide, 16.7 g of acrylonitrile, 1.7 g of phenylmaleimide, 4.2 g of N-(3-carboxy-4-hydroxyphenyl) methacrylamide and 0.45g of AIBN was then added over a period of 1 hour. The mixture was heated to 100 °C an 0.15 g of AIBN was added at intervals of 1 hour

10 till a viscosity of B~C (Gardner density) was obtained. The mixture was cooled to 80 °C and 10.7 g of QHBE solution, 0.05 g of di-n-butyltin dilaurate and 0.1 g of triethylamine were added and the mixture was allowed to react for 8 hours. The progress of the reaction was monitored using GPC by determining the amount of isocyanate functionality present

15 in the mixture. When the reaction was complete, the mixture was poured into 1.5 liter of water. The deposit was filtered , washed and dried to produce 34.1g of QHB-functional acrylic resin CC (Acid Value:115).

Synthesis of QHB-functional Acrylic Resin DD (RESIN DD)

20 Into a 200 ml flask 46.7 g of N,N-Dimethylacetamide and heated at 85 °C was added. 0.15 g of AIBN was then added under a nitrogen atmosphere. A mixture of 46.7 g of N,N-dimethylacetamide, 17.0 g of N-(4-carboxyphenyl)methacrylamide, 16.7 g of acrylonitrile, 1.7 g of

25 phenylmaleimide, 4.2 g of N-(4-hydroxyphenyl)methacrylamide and 0.45 g of AIBN was added over a period of 1 hour. The mixture was heated at 100 °C and 0.15 g of AIBN was added at intervals of 1 hour till a viscosity of B~C (Gardner density) was obtained. The mixture was cooled to 80 °C. 5.4 g of QHBE solution, 0.05 g of di-n-butyltin dilaurate and 0.1 g of

30 triethylamine were added and was reacted for 8 hours. The progress of

the reaction was monitored using GPC by determining the amount of isocyanate functionality present in the mixture. When the reaction was complete, the mixture was poured into 1.5 liter of water. The deposit was filtered, washed and dried to produce 33.1 g of QHB-functional acrylic resin DD (Acid Value:115).

Synthesis of QHB-functional Acrylic Resin EE (RESIN EE)

Into a 200 ml flask was added 46.7 g of N,N-Dimethylacetamide and heated at 85 °C. 0.15 g of AIBN was added under a nitrogen atmosphere. A mixture of 46.7 g of N,N-dimethylacetamide, 17.0 g of N-(4-carboxyphenyl)methacrylamide, 18.9 g of acrylonitrile, 3.1 g of 2-hydroxyethyl methacrylate and 0.45 g of AIBN was added over 1 hour. The mixture was heated to 100 °C and 0.15 g of AIBN was added at 1 hour intervals till a viscosity of B~C (Gardner density) was obtained. The mixture was cooled to 80 °C and 13.4 g of QHBE solution and 0.05 g of di-n-butyltin dilaurate were added. The mixture was allowed to react for 8 hours. The progress of the reaction was monitored using GPC by determining the amount of isocyanate functionality present in the mixture. After THE USUAL workup, a 36.6 g of QHB-functional acrylic resin EE (Acid Value:115) was obtained.

The coating solutions were applied using a roll-coater and the coatings produced were dried for 2 minutes at 100 °C. Coating weight of the top layer and bottom layer were 0.7g/m² and 1.5g/m², respectively. The aluminum sheet substrate of was electrolytically grained, anodized and treated with silicate.

These plates were exposed to IR radiation (Trendsetter 3244: 9W, 150 rpm) and developed by PD-1(1/5~1/11)(30 °C, 20 sec).

	Evaluation		Developing Latitude	Press Life (sheet)	Solvent Resistance
	Top Layer	Bottom Layer			
Example 1	T1	B1	3-4	≥100,000	5
Example 2	T1	B2	4	≥100,000	4
Example 3	T1	B3	4	≥100,000	4
Example 4	T1	B4	4	≥100,000	4
Example 5	T1	B5	5	≥100,000	5
Example 6	T1	B6	4	80,000	2
Example 7	T1	B7	3-4	≥100,000	5
Example 8	T2	B5	3-4	≥100,000	5
Example 9	T3	B1	3	≥100,000	5
Comparative example 1	T1	B8	2	40,000	1
Comparative example 2	T3	B8	1	20,000	1

Range of evaluation results: 5=Excellent to 1=Poor

- 5 Developing latitude was evaluated by density difference of 50%dot developed by 6 part diluted solutions (A) of PD-1 and 12 part diluted solutions (B) of PD-1. Therefore, if density difference (B-A) of 50%dot evaluated by (A) and (B) was small, the influence of the developer concentration was also small, which meant that the printing plate had a wide developing latitude.

10

Press life was evaluated as follows: the printing plates were affixed to a ROLAND R-700 printing machine, and printing was carried out with the UV ink DICURE Scepter Black (manufactured by Dainippon Ink &

Chemicals, Inc.), and 100 part diluted solutions of fountain solution NA-108W (manufactured by Dainippon Ink & Chemicals, Inc.). Evaluation was made based on the final number of printed pages obtained that had accurate printing.

5

Solvent resistance was evaluated by soaking the printing plates in Daicure washer and Daicure roller washer (manufactured by Dainippon Ink & Chemicals, Inc.) for 30 min., and evaluating the degree of corrosion of the printing plates.

10

The present invention has been described with particular reference to the preferred embodiments. It should be understood that variations and modifications thereof can be devised by those skilled in the art without departing from the spirit and scope of the present invention. Accordingly, the present invention embraces all such alternatives, modifications and variations that fall within the scope of the appended claims.

15

FOOTNOTES